

MEMBRANE ELEMENT

PMSW-400LF


Low Fouling & Low Pressure Drop

SPECIFICATIONS

Nominal Membrane Area	400 sq.ft
Permeate Flow:	9,000 gpd (34.1 m ³ /d)
Stabilized Salt Rejection:	99.8 %
Membrane Polymer:	Polyamide Thin-Film Composite
Feed Spacer thickness:	34 mil (0.864 mm)

The stated performance is based on the following conditions:

32,000 ppm NaCl
 800 psi (5.5 MPa) Applied Pressure
 77 °F (25 °C) Operating Temperature
 10% Permeate Recovery
 pH Range 6.5-7.0

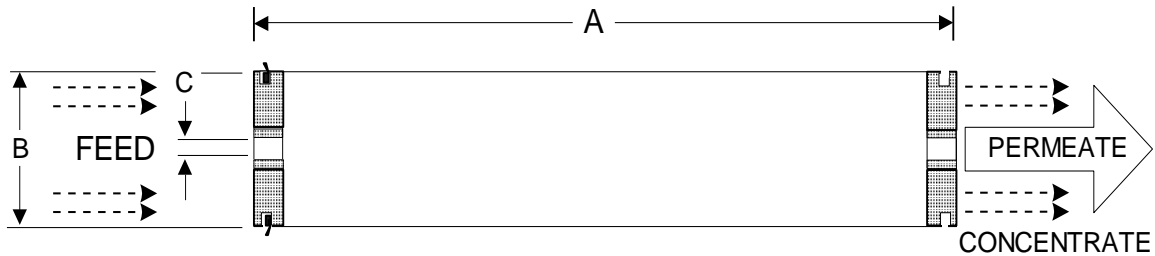

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	7.89 (200)	1.125 (28.6)	36 (16.4)

OPERATING DATA

Maximum Applied Pressure:	1200 psig (8.27 MPa)
Free Chlorine Tolerance:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
Continuous pH Range (Cleaning):	2- 11 (1 - 13)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	85 gpm (19.3 m ³ /h)
Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1
Maximum Pressure Drop:	15 psi

NOTICE:

PERMEATE FLOW FOR AN INDIVIDUAL ELEMENT MAY VARY + OR - 15 PERCENT. ALL MEMBRANE ELEMENTS HAVE A BRINE SEAL, INTERCONNECTOR, AND O-RINGS IN A SEALED POLYETHYLENE PLASTIC BAG. USE GLYCERIN OR SILICON ONLY FOR LUBRICATION OF SEALS AND O-RINGS. ALWAYS AVOID STATIC PERMEATE BACKPRESSURE. WE OFFER DATA IN GOOD FAITH BUT WITHOUT GUARANTEE. PLEASE REFER TO THE APPLICATION INFORMATION LITERATURE ENTITLED OPERATION GUIDELINES FOR MORE INFORMATION BEFORE INSTALLING AND OPERATING THE ELEMENTS.